

Combi.01 - Product Specification



Combi – Greenville rope play house combination

Combi.01 – Greenville Rope-play house Bam.01 with an elevenfold suspended spatial net (rope diameter Ø18mm), bamboo panels, access membrane and a concave curved slide. Equipped with the AstemTT net tensioning system. Greenville lookout with a rope ladder and a climbing-rope and bamboo panels plus an access bridge.

Combi.01 – at a glance.


Product Family:	Greenville	Number of Foundations:	5 pc.
Item Number:	90.293.001	Concrete Volume C20/C25:	2.2 m³
Children's Age:	5+	Number of skilled installers required:	3
Fall Height (DIN EN 1176):	2.00 m (6'-7")	Installation Time without foundation:	16 h
Length x Width x Height:	12.5 x 7.2 x 4.7 m (40'-9" x 23'-6" x 15'-2")	Dimensions of largest part:	6.0 m x 2.1 m x 1.5 m (19'-9" x 6'-11" x 4'-12")
Protective Surfacing Area (DIN EN 1176):	15.9 x 10.5m	Weight of heaviest part:	120 kg (264.6 lbs)
Protective Surfacing Area (ASTM 1487):	16.4 x 11.0m (53'-7" x 35'-11"ft)	Shipping Volume:	upon request
Minimum space required DIN EN 1176:	89.46 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	99.10 m²	Certificate according to DIN EN 1176:	Z1A 13 06 10256 094 TÜV Product Service


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

Combi.01 - Product Specification

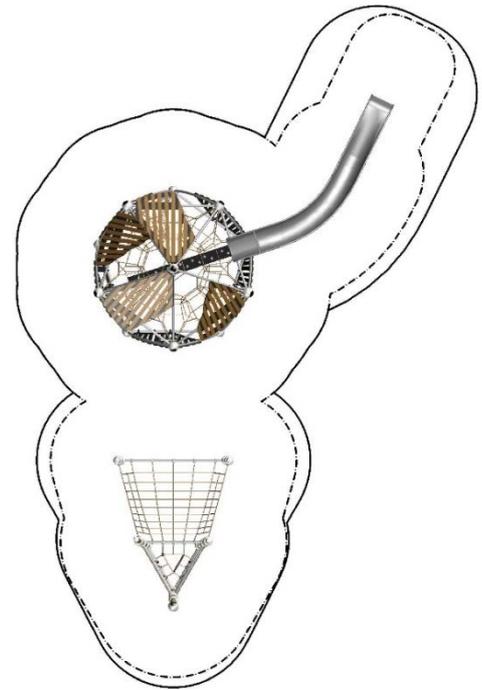

Technical Data.

The following text can also be used for tenders.

- Bam.01 with an elevenfold suspended spatial net, bamboo panels and an concave curved slide.
- Splash with Rope ladder, climbing rope and an access net

Tube framework:

A combination of straight and bended stainless steel Frameworkx-®tubes, Ø 60.3 m (2 3/8"); the tubes are connected to build an oblated icosahedron space framework

Nodes:

Frameworkx-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires; external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene): Ø 16- 18 mm (5/8" - 11/16")

Spacial netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands (no special tools required); rope Ø 18 mm (11/16")

Bamboo panels:

Bamboo strips 90 mm, (3 1/2") mounted at a particle board made from HDPE, 19 mm (3/4") thickness, rounded edges, mounted with aluminum plate clamps to the tubes of the framework

Steel posts:

Steel pipes Ø 133 mm (5 1/4") with a rounded cast aluminum post top, minimum wall thickness 7.1mm (1/4"); anticorrosion treatment and color finish: sandblasting and zinc-/ epoxy-/ polyester-process.

Cross tubes made of stainless steel Frameworkx-®tubes, Ø 60,3 m (2 3/8"), material AISI304 (DIN 1.4301).

Access net:

Rope Ø 16 mm (5/8"), mesh size 300 x 300mm (11-13/16"x11-13/16"), rope crossing points localized by durable, drop forged aluminum-ballknots (no plastic).

Climbing rope:

Rope Ø 21 mm (13/16"), vertical rope with worked-in ebonite cylinders, distance between cylinders 250-300mm (9-13/16" to 11-13/16").

Rope ladder:

Rope Ø 16 mm (5/8"); step material: nylon, black Ø 41mm (1 1/2"), 350mm length (1'-2").

Handrail rope:

Rope Ø 16 mm (5/8"), rope ends are fixed with cast aluminum Terranos clamps (to the outer steel support).

Railing rope:

Rope Ø 16 mm (5/8"), rope ends are fixed with cast aluminum Terranos clamps (to the outer steel support).

Attached slide:

Rope Ø 16 mm (5/8") Curved concave slide made of stainless steel AISI304 (DIN 1.4301), the cheeks are welded with stainless steel handrails, afterwards smoothed and polished. Start height 2000mm (6'-7"); width 600mm (1'- 11 1/2"), connected to the tube at the framework with BSF-aluminum-slide clamps. The gap between the slide and the spatial net is bypassed with a flat net.




Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

