

Tetragode 3854 – Product Specification




Tetragode – Center post structure of the product group Pergode

A quad to climb on — the bestseller as a quadruple. All four structures are connected. Play catch me if you can without touching the ground.

Tetragode 3854 – at a glance.

Product Family:	Pergode	Concrete Volume C20/25:	8,86 m³
Item Number:	71.200.038.54	Number of skilled installers required:	4
Children's Age:	3+	Installation Time without foundation:	16 hours
Fall Height (DIN EN 1176):	1,21 m	Dimensions of largest part:	Ø 0,127 x 4,25m
Length x Width x Height:	13,6 m x 13,6 m x 3,9 m	Weight of heaviest part:	150 kg
Protective Surfacing Area (DIN EN 1176):	16,6 m x 16,6 m	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	180,3 m²	Spare part guarantee:	lifelong
Number of Foundations:	12	Certificate according to DIN EN 1176:	No.: Z2 16 01 10256 251
			TÜV Product Service

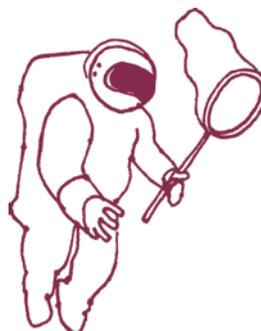



Berliner
Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com

Tetragode 3854 – Product Specification

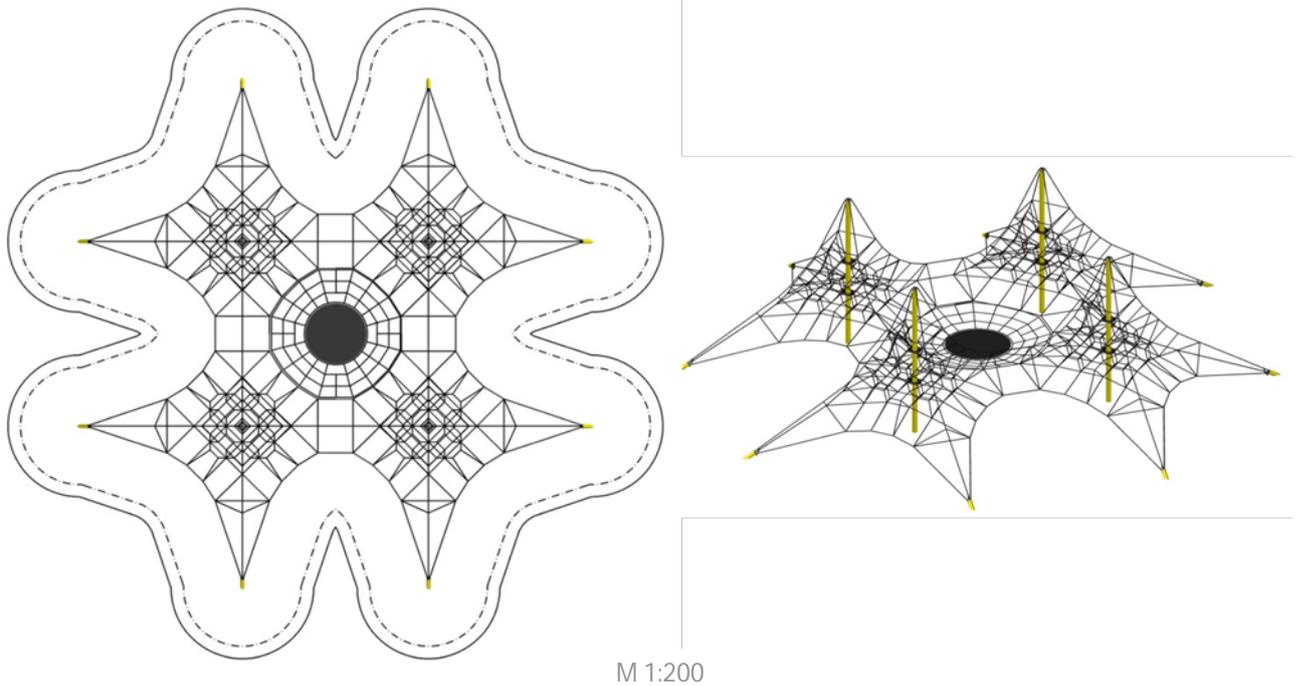

Technical Data.

The following text can also be used for tender.

- 4 Tetragode 3850
- Rubber structure in the center

Central mast climbing structure:

A fourfold suspended climbing net with border cables (rope diameter \varnothing 18 mm) including a spatial net (rope diameter \varnothing 20 mm) and a central steel mast. The four bracing devices with encapsulated clamping system are mounted on the surface of the outer foundations

Central Mast:

Galvanized steel post \varnothing 127 mm

Outer clamping points:

Steel post \varnothing 101.6 mm on steel plates 787 x 300 x 12 mm; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Rubber membrane:

Rubber membrane comprised of durable, vandal-resistant conveyor belt material; rope \varnothing 16 mm (5/8")

Center supporting point

Steel post \varnothing 88.9 mm on steel base plate 500 x 500 x 12 mm, anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene)

Spacial Netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands

