

SpooRoo Combi.01 – Product Specification




Spooky Rookies – Haunted Playhouses for Toddlers

Spooky Rookies promote physical development. During climbing, sliding and romping in the many different playhouses, toddlers are able to test their skills.

It is possible to combine the playhouses' shape, size and colours. A stepladder, ramp or slide offer further constructive options. The diversity of Spooky Rookies are also enjoyed by four ghosts. They represent a colour concept in each case and live in the playhouses. Do not be afraid, the ghosts are pleased about every guest.

SpooRoo Combi.01 – At a glance.

Product Family:	Spooky Rookies	Number of Foundations:	18 pc.
Item Number:	90.296.001	Concrete Volume C20/C25:	1.8 m³ (63.6 ft³)
Children's Age:	3+	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	0.90 m (3'-0")	Installation Time without foundation:	12 hours
Length x Width x Height:	8.5 m x 5.8 m x 2.7 m (27'-11" x 19'-1" x 8'-11")	Dimensions of largest part:	2.6 m x 1.3 m x 0.6 m (8'-7" x 4'-4" x 1'-12")
Protective Surfacing Area(DIN EN 1176):	9.8 m x 8.8 m	Weight of heaviest part:	55 kg (121.3 lbs)
Protective Surfacing Area (ASTM 1487):	10.1 m x 9.5 m (33'-2" x 31'-2")	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	52.00 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	63.54 m² (683.94 ft²)	Certificate according to DIN EN 1176:	No.: Z2 17 01 10256 240 TÜV Product Service




Berliner
Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin


Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com

SpooRoo Combi.01 – Product Specification



scale 1:200

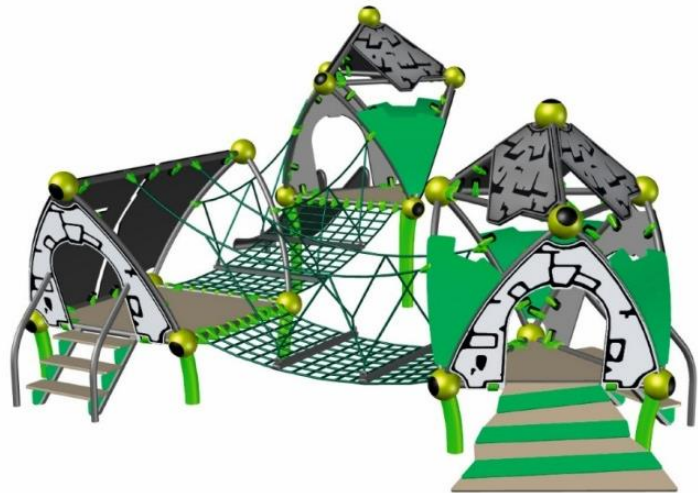

Technical Data.

The following text can also be used for tenders.

- 1 haunted house Spoo S
- 1 haunted house Spoo M
- 1 haunted house Roo S
- 2 stepladders
- 1 slide
- 1 ramp
- 2 rope bridges

Posts:

Steel pipes \varnothing 101.6 mm (0'-4"); wall thickness 4 mm (0'-1") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; Cross tubes - stainless steel Frameworkx-®tubes, \varnothing 48 mm (0'-2")

Nodes:

Frameworkx-®aluminum ball connectors, \varnothing 200 mm (0'-8"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM-caps

Panels/Ramp:

HDPE-panel (roofs and walls), thickness 19 mm (3/4"), panel connected to steel pipes (for more details, see members) with cast aluminum panel clamps; non-skid HPL-panel (bottoms and ramp), thickness 19 mm (3/4")

Ropes:

U-Rope®-round strand ropes with galvanized steel cores, \varnothing 16mm (5/8") – unless otherwise noted; external strands are covered with non-abrasive UV-resistant Polyester-yarn

Rope Bridges:

Rope \varnothing 16mm (5/8"), narrow mesh size; Rope crossing points localized by durable, drop forged aluminum-ballknots (no plastic)

Connections:

Number of mechanical components as less as possible; all bolts and nuts exposing permanently to the weather consist of stainless steel

Stepladders:

non-skid HPL-tiles (steps), thickness 19 mm (3/4"); curved stainless steel handrails

Slide:

Rectangular stainless steel slide, narrow type width 0.46m (1'-7"); side profile with stainless steel split tubes (sharpened and polished); access height 0.90m (2'-12")


Berliner Seilfabrik GmbH & Co.
Lengeder Straße 2/4
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
www.berliner-seilfabrik.com

Revision: February 2017

Page 2

