

Jupiter.07 – Product Specification



Univers – Classics among rope playground equipment

Net structures offer hours of fun and adventure on several levels – climbing and swinging, up and down, horizontally and vertically – space on earth.

The original spatial nets: Born over 40 years ago as a play concept, continuously further developed in form and detail, still popular even after several generations.

Jupiter.07 – at a glance.



| | | | |
|--|---|--|---|
| Product Family: | Univers | Number of Foundations: | 9 pc. |
| Item Number: | 90.140.001 | Concrete Volume C20/C25: | 3.0 m³ (105.9 ft³) |
| Children's Age: | 5+ | Number of skilled installers required: | 4 |
| Fall Height (DIN EN 1176): | 2.50 m (8'-3") | Installation Time without foundation: | 6 hours |
| Length x Width x Height: | 9.4 m x 8.4 m x 4.5 m (30'-9" x 27'-6" x 14'-9") | Dimensions of largest part: | 0.6 m x 0.7 m x 7.0 m (2'-0" x 2'-4" x 23'-0") |
| Protective Surfacing Area (DIN EN 1176): | 12.9 m x 11.8 m | Weight of heaviest part: | 150 kg (330.7 ft³) |
| Protective Surfacing Area (ASTM 1487): | 14.3 m x 13.2 m (47'-0" x 42'-12") | Shipping Volume: | 4.2 m³ (45.2 ft³) |
| Minimum space required DIN EN 1176: | 84.2 m² | Spare part guarantee: | Lifelong |
| Minimum space required ASTM 1487: | 108.0 m² (1,162.5 sf) | | |


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

Jupiter.07 – Product Specification

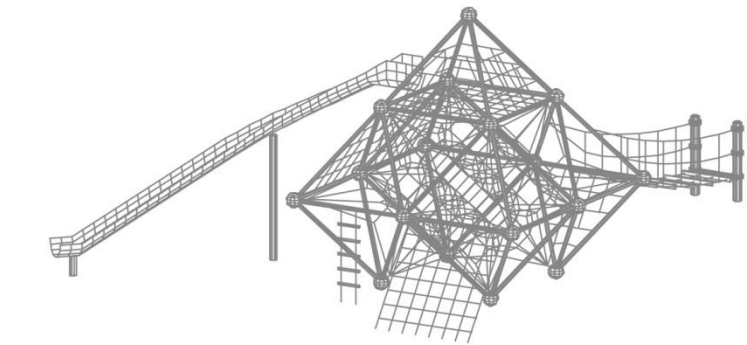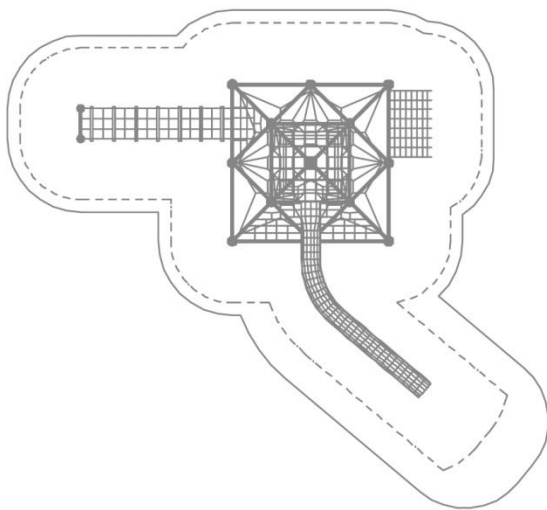

M 1:200

Technical Data.

The following text can also be used for tenders.

Tube framework:

Framework-steel tubes, \varnothing 60.3 mm (2 3/8"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Nodes:

Framework-aluminum ball connectors; \varnothing 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

Ropes:

U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene); rope-diameter \varnothing 16 mm (5/8")

Spatial netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands (no special tools required)

Planar nets:

Seil \varnothing 16 mm, Maschenweite mind. 250 x 250 mm; Seilkreuzungspunkte durch langlebige, gesenkgeschmiedete Aluminiumteile Kugelknoten fixiert (kein Kunststoff)

Planar nets:

Seil \varnothing 16 mm, Maschenweite mind. 250 x 250 mm; Seilkreuzungspunkte durch langlebige, gesenkgeschmiedete Aluminiumteile Kugelknoten fixiert (kein Kunststoff)

Rope ladder:

Rope \varnothing 16 mm (5/8"); black polyamide rungs: \varnothing 40 mm (1-3/5")

Curved slide:

Curved slide made of stainless steel; the cheeks are welded with stainless steel handrails; afterwards smoothed and polished

Suspension bridge:

Rope \varnothing 16 mm (5/8"); mesh size minimum 250 x 250 mm (9-4/5" x 9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic); with in situ-replaceable square rungs comprised of stainless steel profile with aluminum end caps

Posts:

Steel pipes \varnothing 133 mm (5 1/4"); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

Terranos clamps:

Two-part cast aluminum connecting clamps for the height-adjustable connection of rope elements or steel pipes to Terranos steel posts; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process