

Mini Jupiter.01 – Product Specification



Univers – Classics among rope playground equipment

Net structures offer hours of fun and adventure on several levels – climbing and swinging, up and down, horizontally and vertically – space on earth.

The original spatial nets: Born over 40 years ago as a play concept, continuously further developed in form and detail, still popular even after several generations.

Mini Jupiter.01 – At a glance.



Product Family:	Univers	Number of Foundations:	6 pc.
Item Number:	90.141.144	Concrete Volume C20/C25:	1.3 m³ (45.9 ft³)
Children's Age:	5 +	Number of skilled installers required:	2
Fall Height (DIN EN 1176):	1.30 m (4'-1")	Installation Time without foundation:	6 hours
Length x Width x Height:	6.6 m x 3.6 m x 3.7 m (21'-7" x 11'-10" x 12'-2")	Dimensions of largest part:	3,9 m x 1,2 m x 1,1 m (12'-10 x 4'-0" x 3'-8")
Protective Surfacing Area (DIN EN 1176):	10.1 m x 6.6 m	Weight of heaviest part:	80 kg (176,5 lbs)
Protective Surfacing Area (ASTM 1487):	10.2 m x 7.3 m (33'-4" x 23'-10")	Shipping Volume:	Upon request
Minimum space required DIN EN 1176:	52.6 m²	Spare part guarantee:	Lifelong
Minimum space required ASTM 1487:	61.4 m² (660.9 sf)		


Berliner
 Berliner Seilfabrik GmbH & Co.
 Lengeder Straße 2/4
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com
 www.berliner-seilfabrik.com

Mini Jupiter.01 – Product Specification

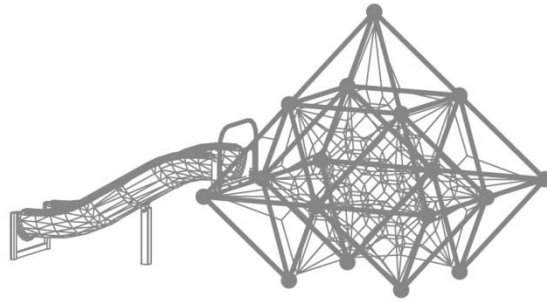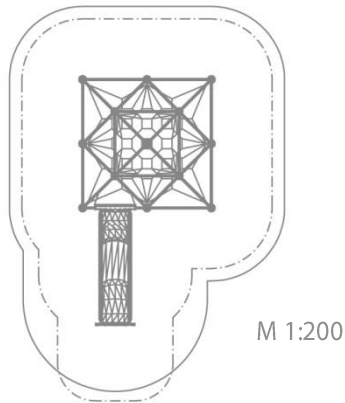

Technical Data.

The following text can also be used for tenders.

- Mini Jupiter
- straight concave slide

Members:

Framework-steel tubes, \varnothing 2 3/8" (60.3 mm); anticorrosion treatment and color finish: sandblasting and epoxy-/polyester-powdercoating.

Nodes:

Framework-aluminum ball connectors, \varnothing 9-13/16" (250 mm); anticorrosion treatment and color finish: sandblasting and epoxy-/polyester-powdercoating; incorporating the unique Astem TT net tensioning system, securely closed with durable ebonite caps.

Ropes:

U-Rope-round strand ropes with galvanized steel cores, \varnothing 5/8" (16 mm); external strands are covered with high abrasion resistant and UV-resistant polyester-yarn.

Spatial netting:

Rope crossing points localized by durable, drop forged aluminum-cloverleaf rings; in situ-replaceable rope lines (no special tools required).

Slide:

Plastic slide made of abrasion-proofed plastic, height: 1.30 m (4'-1")

