

# Pegasus – Product Specification



## Univers – Classics among rope playground equipment

Net structures offer hours of fun and adventure on several levels – climbing and swinging, up and down, horizontally and vertically – space on earth.

The original spatial nets: Born over 40 years ago as a play concept, continuously further developed in form and detail, still popular even after several generations.

### Pegasus – at a glance.


Product Family:	<b>Univers</b>	Number of Foundations:	<b>9 pc.</b>
Item Number:	<b>90.100.145</b>	Concrete Volume C20/C25:	<b>6.4m<sup>3</sup> (226.0 ft<sup>3</sup>)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>3</b>
Fall Height (DIN EN 1176):	<b>3.00 m (9'-11")</b>	Installation Time without foundation:	<b>10 hours</b>
Length x Width x Height:	<b>10.3 m x 10.3 m x 7.2 m (33'-8" x 33'-8" x 23'-10")</b>	Dimensions of largest part:	<b>ø 0,1 m x 4,1 m (ø 0'-4" x 13'-5")</b>
Protective Surfacing Area (DIN EN 1176):	<b>11.6 m x 11.6 m</b>	Weight of heaviest part:	<b>160 kg (352.7 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>10.3 m x 10.3 m (33'-8" x 33'-8")</b>	Shipping Volume:	<b>5.5 m<sup>3</sup> (194.2 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>130.0 m<sup>2</sup></b>	Spare part guarantee:	<b>Lifelong</b>
Minimum space required ASTM 1487:	<b>102.3 m<sup>2</sup> (1,101.1 sf)</b>	Certificate according to DIN EN 1176:	<b>No.: Z2 16 01 10256 241 TÜV Product Service</b>

  
**Berliner**  
 Berliner Seilfabrik GmbH & Co.  
 Lengeder Straße 2/4  
 D-13407 Berlin


Tel. +49.(0)30.41 47 24-0  
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
 www.berliner-seilfabrik.com

# Pegasus – Product Specification

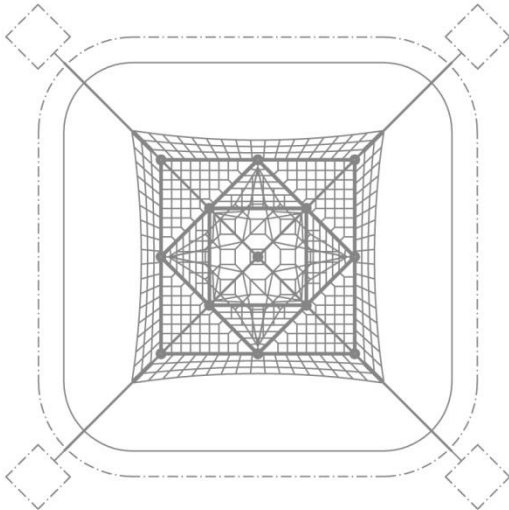

M 1:200

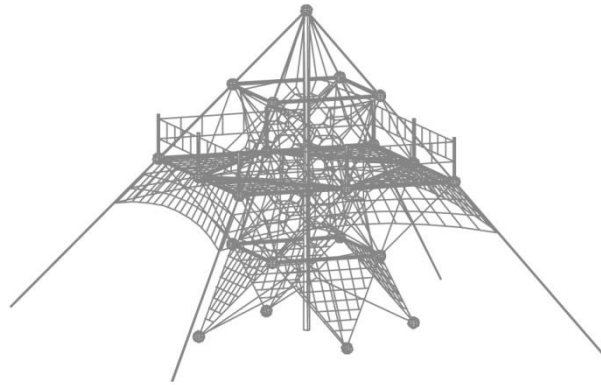

## Technical Data.

The following text can also be used for tenders.

### Central mast:

Steel post 133 mm (5 1/4"), wall thickness 5 mm (3/16"), anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

### Tube framework:

Framework-steel tubes, Ø 60.3 mm (2 3/8"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

### Nodes:

Framework-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; incorporating an ASTEM TT net tensioning system; securely closed with durable EPDM- caps

### Ropes:


U-Rope®-round strand ropes with galvanized and covered wires: external strands with non-abrasive UV-resistant Polyester-yarn (no Polypropylene); rope-diameter Ø 16 mm (5/8")

### Spatial netting:

Rope crossing points are localized with durable, forged aluminum-alloy cloverleaf rings and forged aluminum-alloy ballknots (no plastic connections); in situ-replaceable rope strands (no special tools required)

### Planar nets:

Rope Ø 16 mm (5/8"); mesh size minimum 250 x 250 mm (9-4/5"); rope crossing points localized by durable, drop forged aluminum ballknots (no plastic)



  
**Berliner**  
Berliner Seilfabrik GmbH & Co.  
Lengeder Straße 2/4  
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0  
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
www.berliner-seilfabrik.com